



VME SCSI Adapters

MVS/316 *Ultra SCSI host adapter*

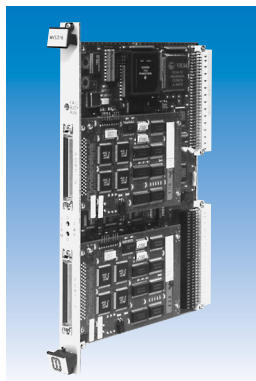


- >32MB/s sustained VMEbus transfer rates (D64)
- >55MB/s DMA burst rates (D64)
- Up to 40MB/s SCSI data transfer rates
- SCSI Initiator/Target with Disconnect/Re-Select Support
- Single or dual SCSI ports configuration
- Single - Ended, differential or mixed configuration
- P2 SCSI port connection
- Complete Solaris, VxWorks, & HP-UX Driver kits

MVS/216 *Fast/Wide SCSI host adapter*

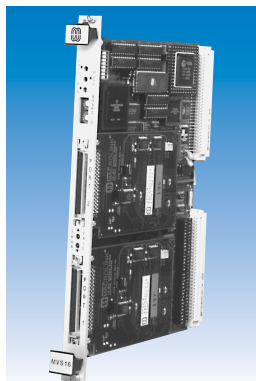

- >12MB/s sustained VMEbus transfer rates (D32)
- >32MB/s DMA burst rates (D32)
- Up to 20MB/s SCSI data transfer rates
- SCSI Initiator/Target with Disconnect/Re-Select Support
- Single or dual SCSI ports configuration
- Single - Ended, differential or mixed configuration
- Direct P2 SCSI port connection
- Complete Solaris, VxWorks, HP-UX & SunOS Driver kits

MVS/200 *Fast SCSI host adapter*

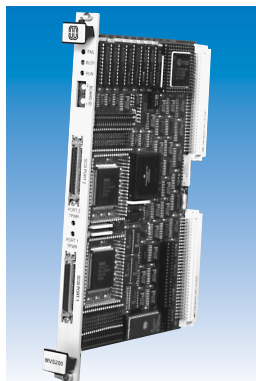

- >7MB/s sustained VMEbus transfer rates (D32)
- >22MB/s DMA burst rates (D32)
- Up to 10MB/s SCSI data transfer rates
- SCSI Initiator/Target with Disconnect/Re-Select Support
- Single or dual SCSI ports configuration
- Single - Ended, differential or mixed configuration
- Direct P2 SCSI port connection
- Complete Solaris, VxWorks, HP-UX & SunOS Driver kits

 **macrolink® inc.**

1500 North Kellogg Drive • Anaheim, California 92807
Phone 714. 777. 8800 • Fax 714. 777. 8807 • info@macrolink.com
Visit our website at www.macrolink.com

